






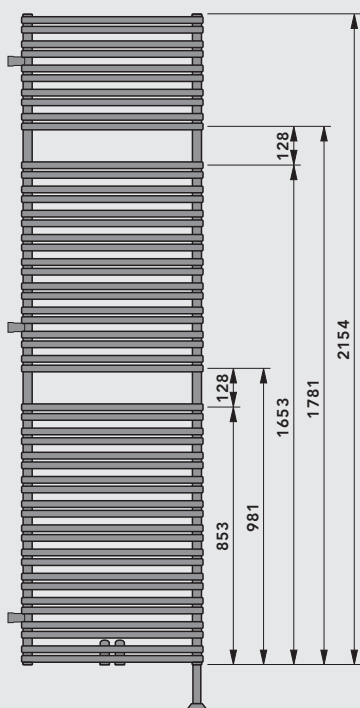

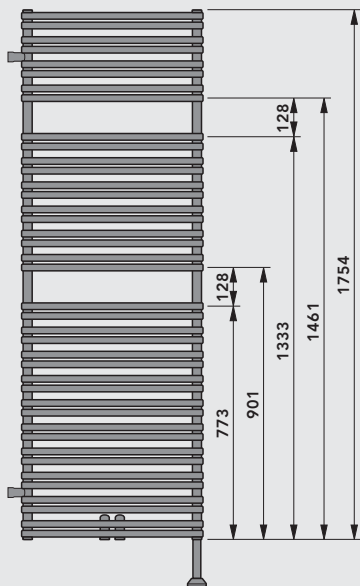

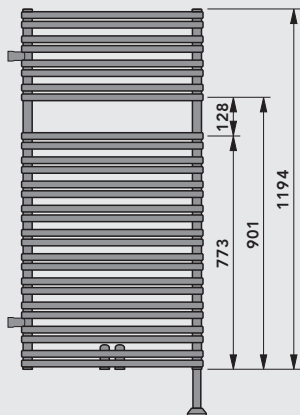







Vertikalmaße [mm]




Technische Daten, Produktfamilie

 Nennhöhe (Bauhöhe)	Abbildungen				 Bau- länge	Heizleistung ⁽¹⁾ 75/65/20 °C [Watt]	Heizkörper- exponent n
	[mm]	500	600	750			
1200 (1194)					500 600 750 900	885 1061 1326 1590	1,265 1,251 1,229 1,208
1800 (1754)					500 600 750 900	1222 1466 1831 2196	1,274 1,258 1,233 1,209
2200 (2154)					500 600 750 900	1445 1724 2145 2560	1,330 1,330 1,330 1,330

⁽¹⁾ Geprüft nach ÖNORM EN 442

Anschlussbeispiel

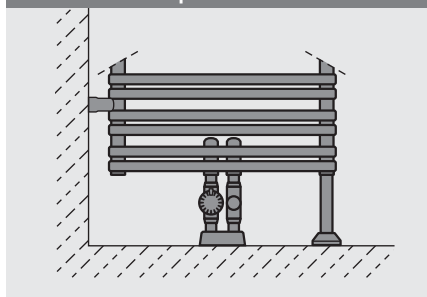

Anschlüsse
 5 x G 1/2 I.G. und
 1 x G 1/2 I.G. Blindmuffe für
 Bodenbefestigung
Anschlussmöglichkeiten analog Skizze



Prüfüberdruck
 13 bar



Max. Betriebsüberdruck
 10 bar



Max. Betriebstemperatur
 110 °C

Serienmäßige Grundausstattung

- Ein Entlüftungsstopfen G 1/2 drehbar und zwei Blindstopfen G 1/2, Messing vernickelt selbstdichtend
- Wand- und Bodenbefestigungsset in der jeweiligen Heizkörperfarbe
- Montagehilfe
- Montageanleitung