
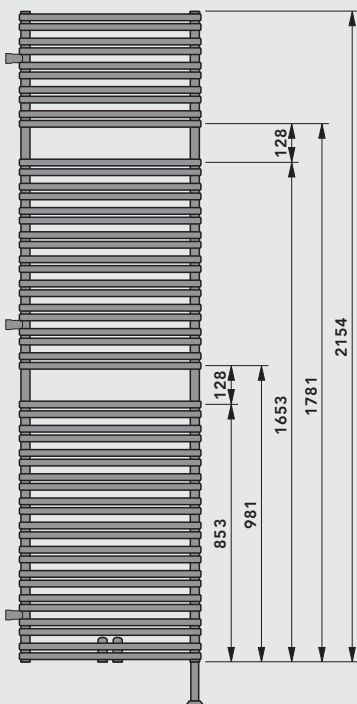
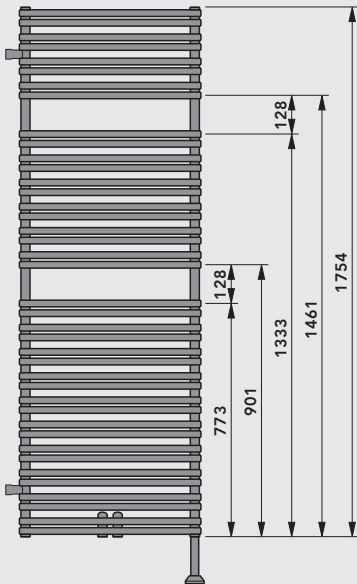


Vertical dimensions [mm]

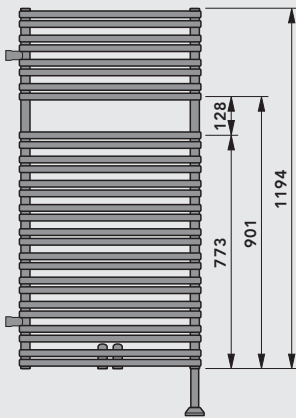


Technical data, product family


Nominal height (overall height)	Diagram scale M 1:50				Overall length [mm]	Heat output <sup>(1)</sup> in Watts 75/65/20 °C	Radiator exponent n	E-heating element power <sup>(2)</sup> [Watts]
	500	600	750	900				
1200 (1194)					500	885	1,265	600
					600	1061	1,251	600
					750	1326	1,229	600
					900	1590	1,208	900
1800 (1754)					500	1222	1,274	600
					600	1466	1,258	900
					750	1831	1,233	900
					900	2196	1,209	900
2200 (2154)					500	1445	1,330	900
					600	1724	1,330	900
					750	2145	1,330	900
					900	2560	1,330	900

<sup>(1)</sup> Tested in accordance with ÖNORM EN 442

Connection example without electric heating element

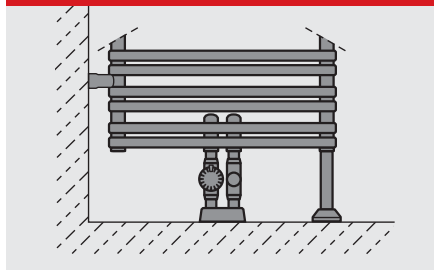

Connection example with electric heating element

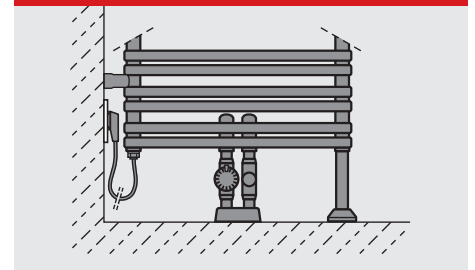

**Connections**  
5 x internal thread G 1/2, and  
1 x internal thread G 1/2;  
blind sleeve for floor fastening  
**Connection modes** see diagram



**Test overpressure**  
13 bar



**Maximum positive operating pressure**  
10 bar



**Maximum operating temperature**  
110 °C

**Accessory: PTC electric heating element**  
ARUN-T radiators fitted with an electric heating element can also be used at times when the regular heating system is switched off. It is **absolutely necessary** to take account of the power-ratings assigned to the electric heating elements.

**Basic standard accessories (included):**

- a pivotable vent plug, G 1/2, and two dummy plugs, G 1/2, nickel-plated brass, self-sealing
- a wall and floor fastening set matching the radiator colour
- fitting aid
- instruction sheet

RAL 9016 Traffic White	Various RAL and metallic colours	Sanitary ware colours
Item no.	Item no.	Item no.
DFTMB1205A	DFTMF1205A	DFTMS1205A
DFTMB1206A	DFTMF1206A	DFTMS1206A
DFTMB1207A	DFTMF1207A	DFTMS1207A
DFTMB1209A	DFTMF1209A	DFTMS1209A
DFTMB1805A	DFTMF1805A	DFTMS1805A
DFTMB1806A	DFTMF1806A	DFTMS1806A
DFTMB1807A	DFTMF1807A	DFTMS1807A
DFTMB1809A	DFTMF1809A	DFTMS1809A
DFTMB2205A	DFTMF2205A	DFTMS2205A
DFTMB2206A	DFTMF2206A	DFTMS2206A
DFTMB2207A	DFTMF2207A	DFTMS2207A
DFTMB2209A	DFTMF2209A	DFTMS2209A

(2) At 60 °C

