
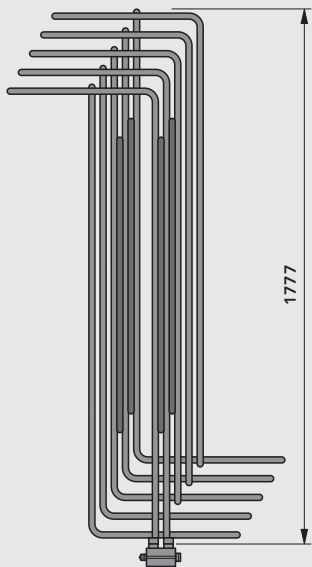


Vertical dimensions [mm]

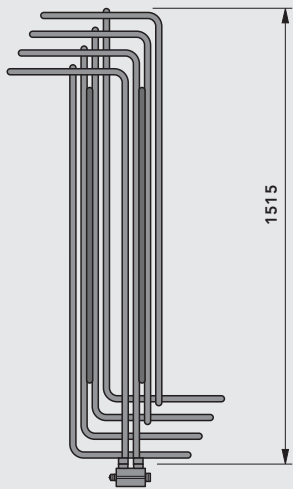


Technical data, product family

Overall height	Diagram scale M 1:50		Overall length	Heat output <sup>(1)</sup> in Watts 75/65/20 °C
	[mm]			
1515	718	918	718	534
1777			918	745

<sup>(1)</sup> Tested in accordance with ÖNORM EN 442 -

Connection example



**Connections**  
 2 x external thread G 3/4  
 (valve connection set)  
 1 x internal thread G 1/4 (for vent plug)  
**Connection modes** see diagram



**Test overpressure**  
 13 bar



**Maximum positive operating pressure**  
 10 bar





**Maximum operating temperature**  
 110 °C

**Basic standard accessories (included):**

- decor bands (2 or 4 sections)
- a pivotable vent plug, G 1/4, nickel-plated brass, self-sealing
- a valve connection set with angled two-pipe design
- covering rosette in matching radiator colour
- wall fastening set matching the radiator colour
- fitting aid
- instruction sheet

FLINT Standard	① Radiator Traffic White RAL 9016  ② Valve cover Traffic White RAL 9016  ③ Decor bands Grey Aluminium RAL 9007	FLINT Elegance	① Radiator Colour optional, see colour chart  ② Valve cover Farbe wie Heizkörper  ③ Decor bands Colour optional, see colour chart, or Chrome	FLINT Chrome-plated	① Radiator Chrome  ② Valve cover Chrome  ③ Decor bands Colour optional, see colour chart, Chrome or Gold	FLINT Gold-plated	① Radiator Gold  ② Valve cover Gold  ③ Decor bands Colour optional, see colour chart, Chrome or Gold
Item no.		Item no.		Item no.		Item no.	
DFLAB1507A		DFLAE1507A		DFLAC1507A		DFLAM1507A	
DFLAB1809A		DFLAE1809A		DFLAC1809A		DFLAM1809A	

with chrome-plated or gold-plated surface reduced output of about 15 %.

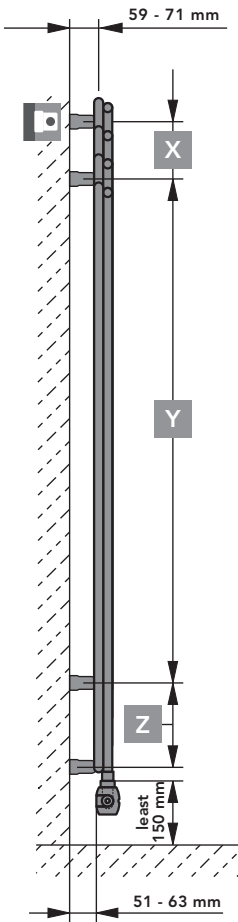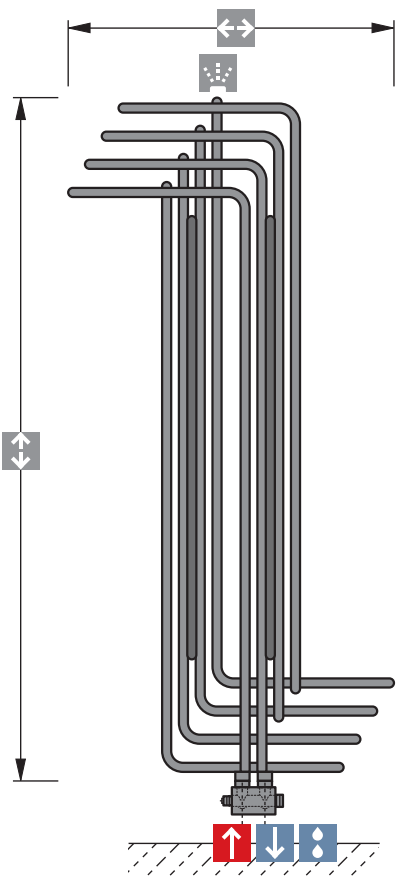

<b>X</b>	for an overall height of 1509 ...	124 mm
	for an overall height of 1771 ...	186 mm
<b>Y</b>	for an overall height of 1509 ...	1112 mm
	for an overall height of 1771 ...	1250 mm
<b>Z</b>	for an overall height of 1509 ...	186 mm
	for an overall height of 1771 ...	248 mm

