
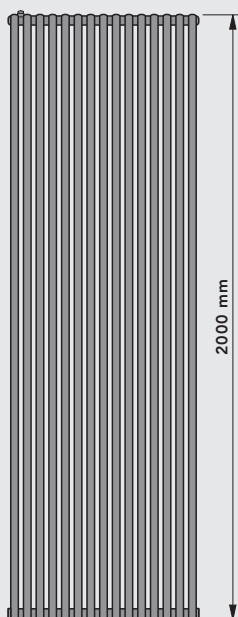
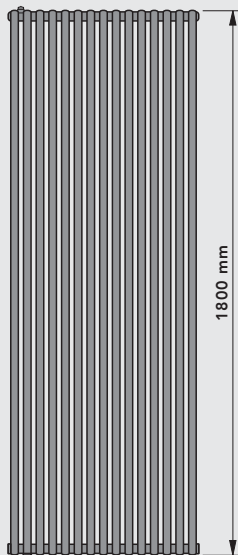


Vertical dimensions [mm]

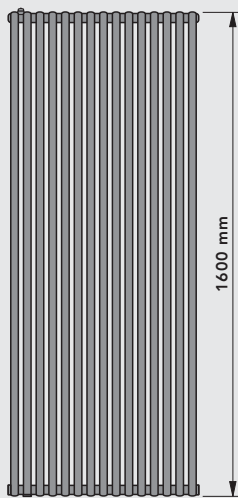


Technical data, product family

Nominal height (overall height)	Diagram scale M 1:50				Overall length [mm]	Heat output ⁽¹⁾ in Watts 75/65/20 °C	Radiator exponent n	E-heating element power ⁽²⁾ [Watts]
	504	630	756	882				
1600 (1600)					504	1476	1,334	600
					630	1828	1,339	900
					756	2176	1,343	900
					882	2522	1,348	900
1800 (1800)					504	1607	1,338	600
					630	1990	1,347	900
					756	2369	1,355	900
					882	2746	1,364	900
2000 (2000)					504	1726	1,341	900
					630	2136	1,354	900
					756	2543	1,368	900
					882	2948	1,381	900

⁽¹⁾ Tested in accordance with ÖNORM EN 442

Connection example without electric heating element

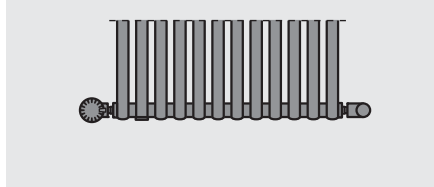


Connections
3 x internal thread G 1/2, and
3 x internal thread G 1/4,
(for vent and drain plugs)
Connection modes
see diagram

Test overpressure
13 bar

Maximum positive operating pressure
10 bar max.

Maximum operating temperature
110 °C

Connection example with electric heating element

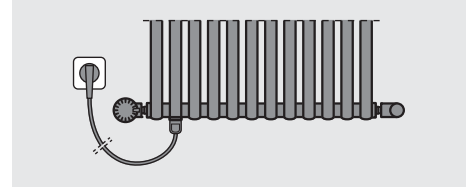

Accessory: PTC electric heating element
GURA radiators fitted with an electric heating element can also be used at times when the regular heating system is switched off. It is **absolutely necessary** to take account of the power-ratings assigned to the electric heating elements.

Basic standard accessories (included):

- a pivotable vent plug, G 1/4, and two dummy plugs, G 1/4, as well as a dummy plug, G 1/2, nickel-plated brass, self-sealing
- a wall mounting set matching the radiator colour
- fitting aid
- instruction sheet

RAL 9016 Traffic White	Various RAL and metallic colours	Sanitary ware colours
Item no.	Item no.	Item no.
DATNB1605A	DATNF1605A	DATNS1605A
DATNB1606A	DATNF1606A	DATNS1606A
DATNB1607A	DATNF1607A	DATNS1607A
DATNB1609A	DATNF1609A	DATNS1609A
DATNB1805A	DATNF1805A	DATNS1805A
DATNB1806A	DATNF1806A	DATNS1806A
DATNB1807A	DATNF1807A	DATNS1807A
DATNB1809A	DATNF1809A	DATNS1809A
DATNB2005A	DATNF2005A	DATNS2005A
DATNB2006A	DATNF2006A	DATNS2006A
DATNB2007A	DATNF2007A	DATNS2007A
DATNB2009A	DATNF2009A	DATNS2009A

⁽²⁾ At 60 °C

