
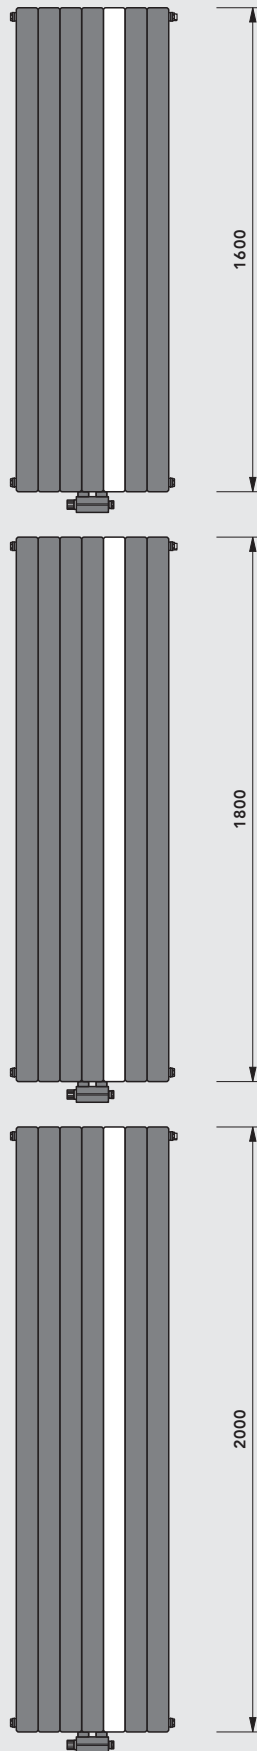

















Vertical dimensions [mm]





 Basic radiator colour  
 Colour of decor panel

Technical data, product family


 Overall height [mm]	Diagram scale M 1:50				 Overall length [mm]	Heat output <sup>(1)</sup> in Watts 75/65/20 °C	
	358	502	646	862		VSM 10	VSM 21
1600					358	622	1140
					502	872	1598
					646	1123	2057
					862	1498	2745
1800					358	708	1285
					502	993	1801
					646	1278	2318
					862	1706	3093
2000					358	799	1436
					502	1120	2014
					646	1442	2592
					862	1924	3458

<sup>(1)</sup> Tested in accordance with ÖNORM EN 442

 **Connections**  
 2 x external thread G ¾ (bottom centre)  
**Connection modes**  
 see diagram

 **Maximum operating temperature**  
 110 °C

 **Maximum positive operating pressure**  
 Standard design:  
 5 bar

 **Maximum positive operating pressure**  
 High-pressure design:  
 (supplement of 10 %): 8 bar

- Basic standard accessories (included):**
- a drain plug, G ½, and
  - a pivotable vent plug, G ½, nickel-plated brass, self-sealing, factory-sealed
  - a valve connection set with angled two-pipe design
  - covering rosette in matching radiator colour
  - installation sheet

Angled connection fitting

Z


Mounting	Model	Dimension	Y
*	VSM 10	*	
WA 11	VSM 21	63 mm	

**Note:**  
VSM models are only available with welded-on brackets.


- For the installation of the VSM 21 model use the WA 11 wall fastening set.
- \*For the installation of the VSM 10 model with the angled connection fitting Z, please use the appropriate drill consoles or angled fastening set in order to obtain the necessary wall clearance.

Radiator exponent n		RAL 9016 Traffic White <sup>(2)</sup>	RAL 9007 Grey Aluminium <sup>(2)</sup>	RAL 9016 Traffic White <sup>(2)</sup>	RAL 9007 Grey Aluminium <sup>(2)</sup>
		VSM 10	VSM 10	VSM 21	VSM 21
VSM 10	VSM 21	Item no.	Item no.	Item no.	Item no.
1,399	1,404	D10ME3616E	D10MA3616E	D21ME3616E	D21MA3616E
1,399	1,404	D10ME5016E	D10MA5016E	D21ME5016E	D21MA5016E
1,399	1,404	D10ME6516E	D10MA6516E	D21ME6516E	D21MA6516E
1,399	1,404	D10ME8616E	D10MA8616E	D21ME8616E	D21MA8616E
1,401	1,397	D10ME3618E	D10MA3618E	D21ME3618E	D21MA3618E
1,401	1,397	D10ME5018E	D10MA5018E	D21ME5018E	D21MA5018E
1,401	1,397	D10ME6518E	D10MA6518E	D21ME6518E	D21MA6518E
1,401	1,397	D10ME8618E	D10MA8618E	D21ME8618E	D21MA8618E
1,390	1,381	D10ME3620E	D10MA3620E	D21ME3620E	D21MA3620E
1,390	1,381	D10ME5020E	D10MA5020E	D21ME5020E	D21MA5020E
1,390	1,381	D10ME6520E	D10MA6520E	D21ME6520E	D21MA6520E
1,390	1,381	D10ME8620E	D10MA8620E	D21ME8620E	D21MA8620E

<sup>(2)</sup> Colour of decor panel see colour chart

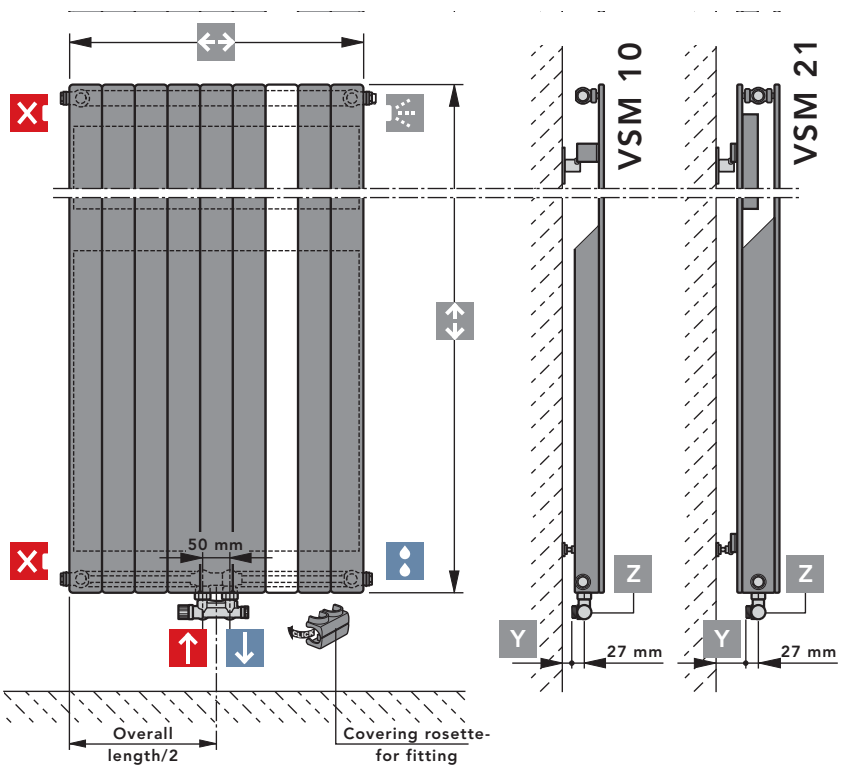

**Z** Connection fitting  
Two-pipe operation – angled design

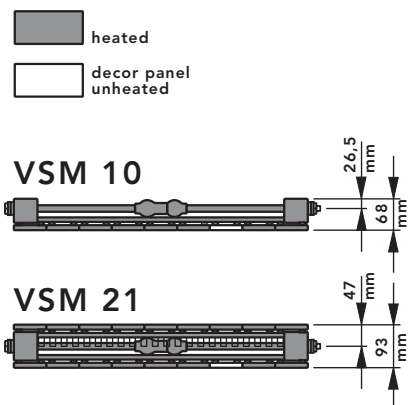

heated  
decor panel unheated