


KONTEC.



Advantage:


Kontec convectors and heating panels are noted for their precise lines and wide range of capacities, sizes and colours.

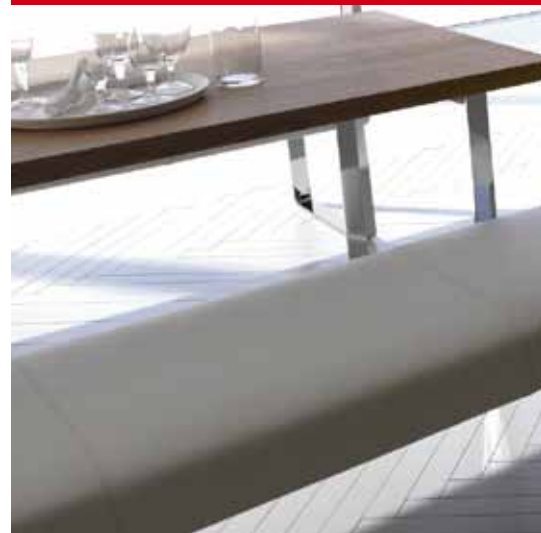

The greatest skill of the design lies in the creation of simplicity. With noticeably clear lines, **Kontec** convectors and heating panels blend modestly into the background and emphasise their sense for the aesthetic.



interlücke

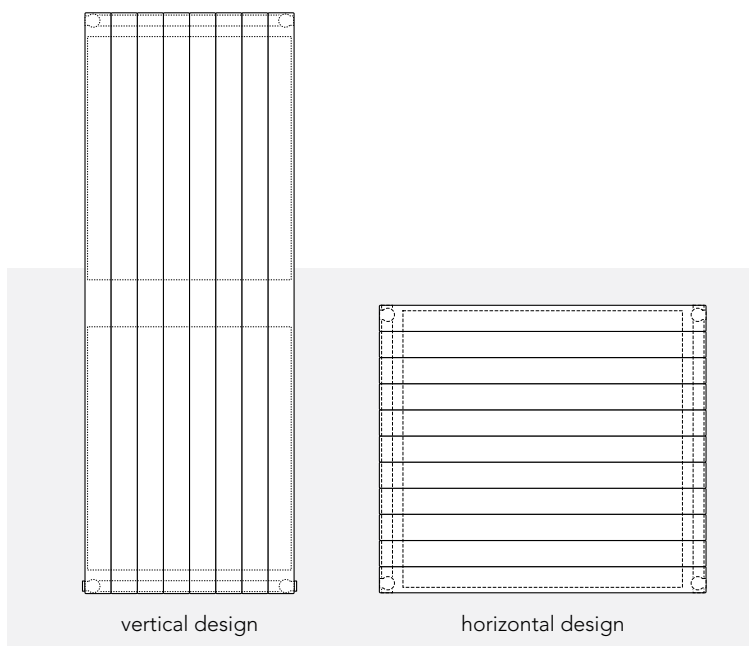

vertical design

horizontal design

Kontec vertical version								
Type	KS 10		KS 11		KS 20		KS 21	
Height	1600	1800	1600	1800	1600	1800	1600	1800
Hub distance	1550	1750	1550	1750	1550	1750	1550	1750
Height	2000	2200	2000	2200	2000	2200	2000	2200
Hub distance	1950	2150	1950	2150	1950	2150	1950	2150
Length	142 to 862		142 to 862		142 to 862		142 to 862	
Depth	68		68		93		93	
Increments	starting with overall length of 142 mm: increments of 72 mm							

Kontec horizontal version																				
Type	KH 10			KK 11			KH 11			KK 20			KH 20			KK 22			KH 22	
Height	358	430	502	-	-	358	430	502	-	142	358	430	502	70	142	358	430	502		
Hub distance	318	390	462	-	-	318	390	462	-	102	318	390	462	32	102	318	390	462		
Height	574	646	790	214	286	574	646	790	214	286	574	646	790	214	286	574	646	790		
Hub distance	534	606	750	174	246	534	606	750	174	246	534	606	750	174	246	534	606	750		
Length	500 to 2400			500 to 2400			500 to 2400			500 to 2400			500 to 2400							
Depth	68			68			68			93			93							
Increments	starting with overall length of 500 mm: increments of 100 mm, from overall length of 1400 mm: increments of 200 mm																			

Kontec horizontal version																
Type	KK-S 22		KK 23		KK 34		KK-S 34		KK 35		KK 46		KK-S 47		KK 58	
Height	70	142	70	142	70	142	70	142	70	142	70	142	70	142	70	142
Hub distance	32	102	32	102	32	102	32	102	32	102	32	102	32	102	32	102
Height	214	286	214	286	214	286	214	286	214	286	214	286	214	286	214	286
Hub distance	174	246	174	246	174	246	174	246	174	246	174	246	174	246	174	246
Length	500 to 2400		500 to 2400		500 to 2400		500 to 2400		500 to 2400		500 to 2400		500 to 2400		500 to 2200	
Depth	163		150		175		245		232		257		327		339	
Increments	starting with overall length of 500 mm: increments of 100 mm, from overall length of 1400 mm: increments of 200 mm															

Information in mm.