



## Trend & Style

BAWA-VM SPA	180
FATALA-VM SPA	181
FATALA-VM SPA left hand design	182

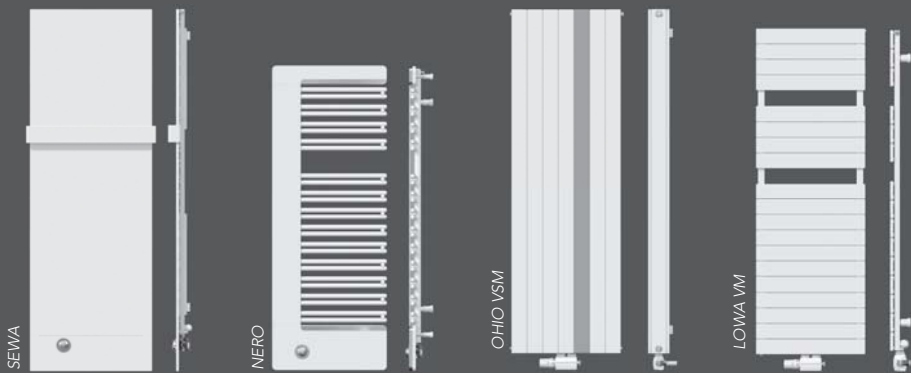

## Architecture & Design

SEWA	183
NERO	184
OHIO VSM	185
LOWA VM	186

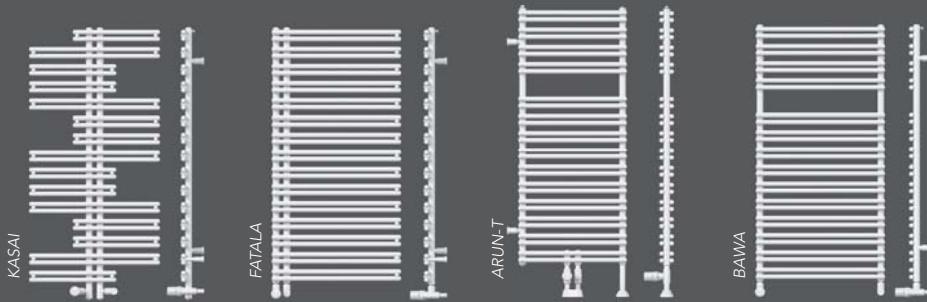

## Universal & Modern

KASAI	187
FATALA	188
FATALA left hand design	189
FATALA electric-only operation	190
FATALA left hand design and electric-only	191
FATALA Replacement	192
FATALA Mod. left hand design	193
ARUN-T	194
BAWA	195
BAWA VM	196
BAWA-T VM	197
BAWA electric-only operation	198
BAWA Replacement	199
BAWA-T Replacement	200



## Country house & Classics

VELINO	201
CAVALLY	202
CAVALLY-VM	203
FULDA	204
FULDA-VM	205
FULDA electric-only operation	206
SEINE-V	207

Conversion table	208
Connection modes	209
Accessories	210
General information	215

## Basics



ULOW-E2

Profile panel radiators

Plan panel radiators

Vertical radiators



General information

Preformed plate system


Stapler system

Special systems






Towel warmers

Design radiators

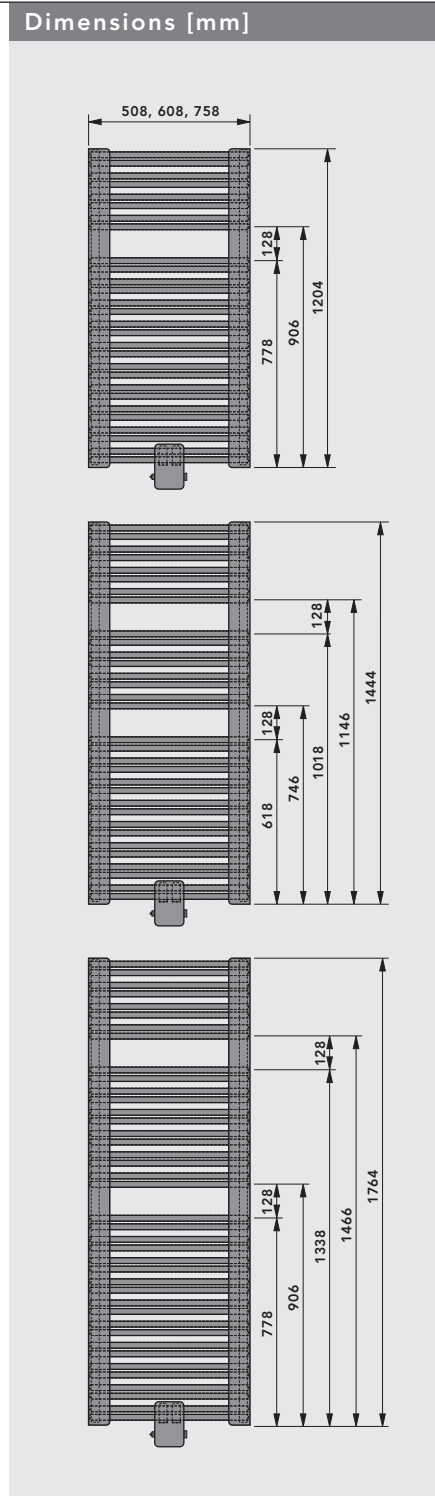

BAWA-VM SPA						
Nominal height (Overall height) [mm]	Overall length [mm]	Heat output <sup>(1)</sup> in Watts 75/65/20 °C	Radiator exponent n	E-heat element Output <sup>(2)</sup> Watt	Weight kg	Water content l
1200 (1204)	508	629	1,2010	300	14,64	5,40
	608	738	1,2012	300	16,34	6,30
	758	898	1,2014	600	18,89	7,65
1500 (1444)	508	747	1,2270	300	17,25	6,58
	608	876	1,2246	600	19,28	7,59
	758	1066	1,2209	600	22,32	9,10
1800 (1764)	508	885	1,2605	600	20,63	8,10
	608	1038	1,2546	600	23,08	9,25
	758	1263	1,2458	600	26,76	10,98

<sup>(1)</sup> Tested in accordance with ÖNORM EN 442    <sup>(2)</sup> at 60° C

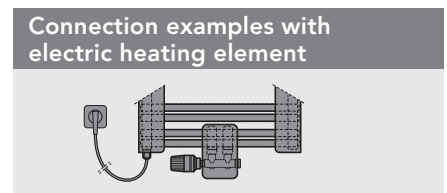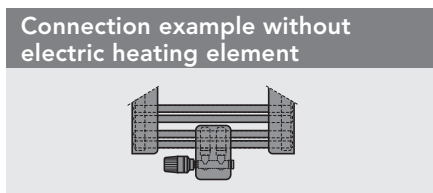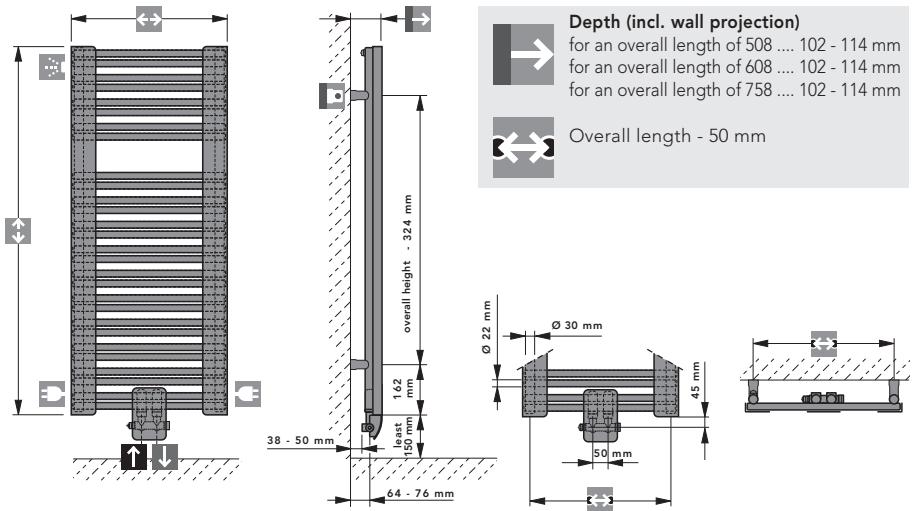

- Connections**  
 2 x external thread G 3/4 (for valve connection set)  
 2 x internal thread G 1/2 and  
 1 x internal thread G 1/4 (for vent plugs)  
**Connection options**  
 In line with drawing
- Test overpressure**  
 13 bar
- Maximum positive operating pressure**  
 10 bar max.
- Maximum operating temperature**  
 110 °C

- Standard basic configuration, as supplied**
- A pivotable vent plug, G 1/4, and two dummy plugs, G 1/2, nickel-plated brass self-sealing, factory-sealed
  - A valve connection set in an angled two-pipe design
  - A covering rosette matching the radiator colour
  - A wall mounting set matching the radiator colour
  - A fitting aid
  - An instruction sheet

**Accessory: PTC electric heating element**  
 All BAWA-VM SPA radiators fitted with an electric heating element can also be used when the regular heating system is switched off. It is essential to take into account the power ratings assigned to the electric heating elements.