





NERO		Heat output ⁽¹⁾ in Watts			Radiator exponent n	E-heat element Output ⁽²⁾ Watt	Weight kg	Water content l
Nominal height (Overall height) [mm]	Overall length [mm]	75/65/20 °C	70/55/20 °C	55/45/20 °C				
1000 (1019)	530	451	361	225	1,366	300	17,6	4,1
1400 (1419)	530 630	614 721	503 590	327 384	1,232 1,218	300 600	22,1 25,0	5,5 6,6
1800 (1819)	530 630	794 968	649 792	422 515	1,407 1,246	600 600	27,0 30,0	7,2 8,3

⁽¹⁾ Tested in accordance with ÖNORM EN 442 ⁽²⁾ at 60° C

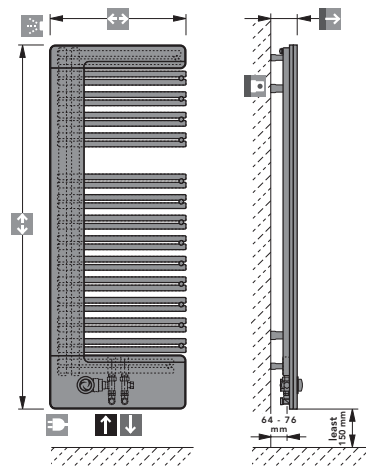

Overall depth (incl. wall clearance)
 for an overall length of 530 106 - 118 mm
 for an overall length of 630 106 - 118 mm

Overall length - 170 mm

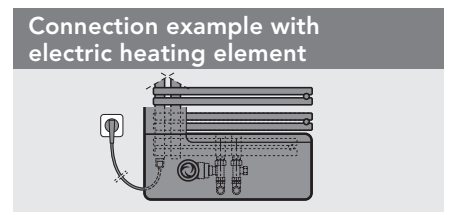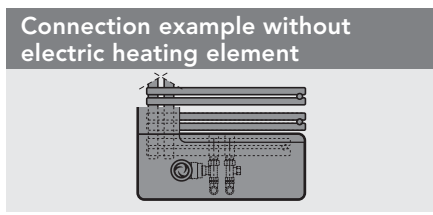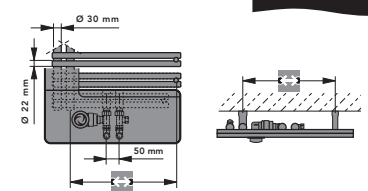

Connections
 2 x G 1/2 Internal thread
 1 x G 1/4 Internal thread (for vent plug)
 2 x G 3/4 External thread (mounting brackets or extensions)
Connection modes
 see diagram

Test overpressure
 13 bar

Maximum positive operating pressure
 10 bar max.

Maximum operating temperature
 110 °C

- Standard basic configuration**
- An integrated valve connection set incl. thermostat head
 - A pivotable vent plug, G 1/4, nickel-plated, self-sealing, factory-sealed
 - A wall mounting set matching the radiator colour
 - 2 mounting brackets, alternatively: 2 extensions
 - Fitting aid
 - Instruction sheet

Accessory: PTC electric heating element
 All NERO design radiators fitted with an electric heating element can also be used when the regular heating system is switched off. It is essential to take into account the power ratings assigned to the electric heating elements.