


## Dimensions [mm]

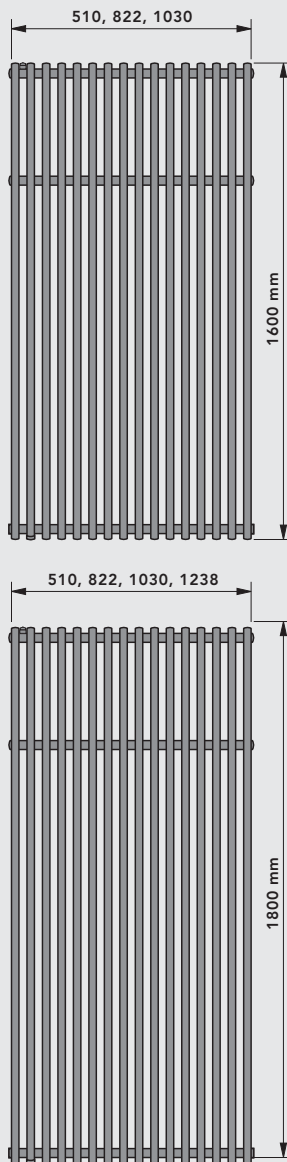


## VELINO

Nominal height (Overall height) [mm]	Overall length [mm]	Heat output <sup>(1)</sup> in Watts					Radiator exponent n	E-heat element Output <sup>(2)</sup> Watt	Weight kg	Water content l
		75/65/20 °C	70/55/20 °C	70/55/24 °C	55/45/20 °C	55/45/24 °C				
1600 (1600)	510	850	691	602	444	365	1,273	615	13,5	6,5
	822	1359	1105	963	709	584	1,273	615	21,6	10,4
	1030	1699	1382	1204	887	731	1,273	615	27,0	13,0
1800 (1800)	510	948	771	671	494	407	1,274	615	15,0	7,7
	822	1516	1232	1074	791	651	1,274	615	24,0	12,3
	1030	1895	1541	1342	988	814	1,274	615	30,0	15,4
	1238	2274	1849	1610	1186	977	1,274	615	35,8	18,5



<sup>(1)</sup> Tested in accordance with ÖNORM EN 442

<sup>(2)</sup> at 60° C C

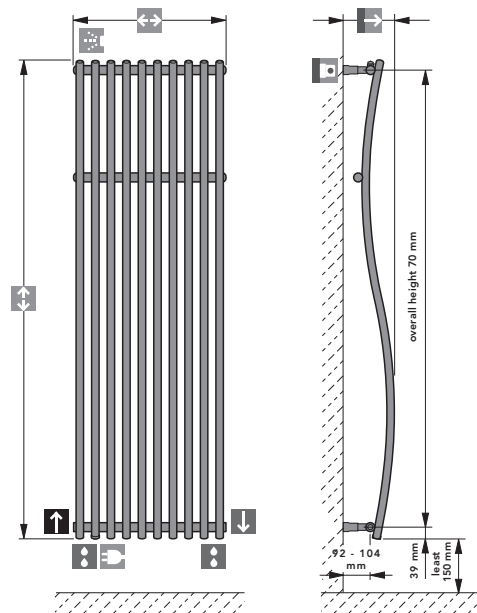

**Overall depth (incl. wall clearance)**  
 bei Overall height 1600 .... 169 - 181 mm  
 bei Overall height 1800 .... 177 - 189 mm

for an overall length of 510 .... 312 mm  
 for an overall length of 822 .... 624 mm  
 for an overall length of 1030 .... 832 mm  
 for an overall length of 1238 .... 1040 mm

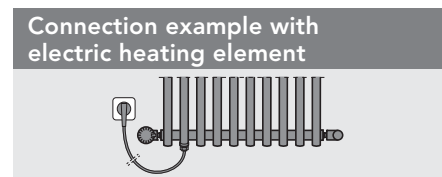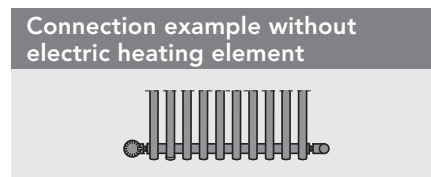

BAWA-T  
replacement  
VELINO

**Connections**  
 3 x G 1/2 Internal thread and  
 3 x G 1/4 Internal thread (for vent and  
 drain plugs)  
**Connection modes**  
 see diagram

**Test overpressure**  
 13 bar

**Maximum positive operating pressure**  
 10 bar

**Maximum operating temperature**  
 110 °C

**Standard basic configuration**

- A pivotable vent plug, G 1/4, and two dummy plugs, G 1/4, as well as a dummy plug, G 1/2, nickel-plated brass, self-sealing
- A wall mounting set matching the radiator colour
- Fitting aid
- Instruction sheet

**Accessory: PTC electric heating element**  
 All VELINO design radiators fitted with an electric heating element can also be used when the regular heating system is switched off. It is essential to take into account the power ratings assigned to the electric heating elements.