

## **TARA**

### **MULTI-TALENT WITH A STRONG CHARACTER**

#### **Comfort by quality**

High performance in ideal combination with maximised efficiency - this is what makes TARA your safe choice to get heating comfort and sustainability. Enjoy premium design made of first-class materials - for many decades to come!

#### **Puristic design**

In an increasingly complex world, people look out for simple, clearly defined lines. TARA represents timeless straight-forwardness, packed with trend-setting technology. Get intrigued by its subtle elegance and distinctive unobtrusiveness.

#### **Uncompromising variety**

It is not only the extraordinary slim depth of only 73 mm (singlelayer) or the vertical design that make TARA versatile to fit in every room, but also the wide range of RAL and sanitary colours that leave nothing to be desired. Or make a mark with metallic and structured colours!

## **VERTICAL DECORATIVE RADIATOR**


#### **Facts:**

- subtle visual impression
- high heating output
- low depth
- wide range of colours
- central connection
- optional towel holder




# TARA

TECHNICAL DATA								
Type	Construction height	Effective construction length [mm]	Nominal construction length [mm]	75/65/20°C [Watt]	Radiator exponent n	Water volume [l]	Weight [kg]	Item no.
11	1800	325	300	653	1,2810	3,50	6,83	F2U111800301000
		475	450	976	1,2761	5,25	14,43	F2U111800451000
		625	600	1298	1,2711	7,00	24,83	F2U111800601000
	1950	325	300	720	1,2418	3,80	7,54	F2U111950301000
		475	450	1056	1,2811	5,47	16,09	F2U111950451000
		625	600	1393	1,3205	7,13	27,86	F2U111950601000
	2100	775	750	1729	1,3598	8,80	42,82	F2U111950751000
		625	600	1429	1,2575	8,12	29,84	F2U112100601000
		775	750	1749	1,2685	10,15	45,88	F2U112100751000
21	1800	325	300	886	1,3192	6,44	9,78	F2U211800301000
		475	450	1329	1,3192	9,66	21,43	F2U211800451000
		625	600	1772	1,3192	12,88	37,60	F2U211800601000
	1950	325	300	936	1,3231	7,24	10,66	F2U211950301000
		475	450	1405	1,3231	10,86	23,37	F2U211950451000
		625	600	1873	1,3231	14,48	41,00	F2U211950601000
	2100	775	750	2341	1,3231	18,10	63,55	F2U211950751000
		625	600	1957	1,3327	15,28	43,90	F2U212100601000
		775	750	2446	1,3327	19,10	68,05	F2U212100751000

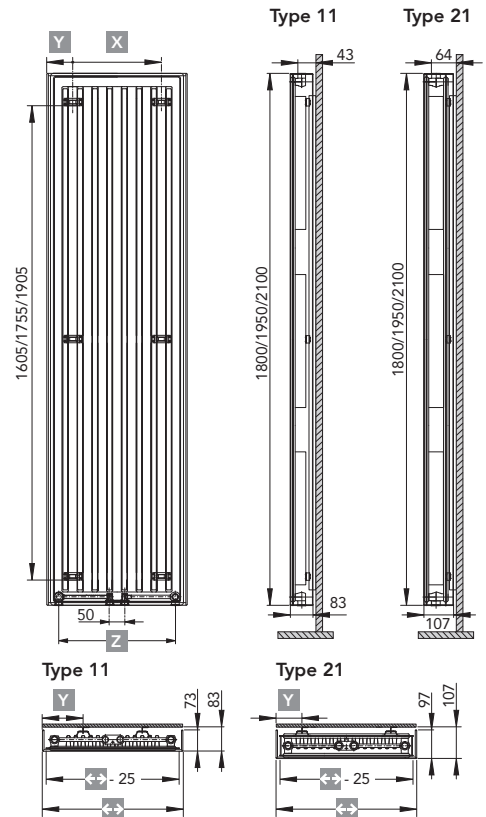

# TARA E

TECHNICAL DATA								
Type	Construction height	Effective construction length [mm]	Nominal construction length [mm]	Nominal power [Watt]	Radiator exponent n	Protection mode	Weight [kg]	Item no.
11	1800	325	300	750	1,2810	IP 44	11,44	F2Z1118003000300
		475	450	1000	1,2761	IP 44	22,52	F2Z1118004500300
		625	600	1250	1,2711	IP 44	37,12	F2Z1118006000300
	2100	625	600	1500	1,3205	IP 44	40,98	F2Z1119506000300
		625	600	1750	1,2575	IP 44	44,03	F2Z1121006000300
		775	750	2000	1,2685	IP 44	65,69	F2Z1121007500300

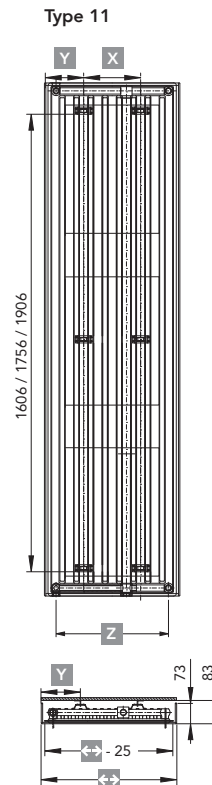

Type	↔	X	Y	Z
11	325	100	112,5	244
	475	200	137,5	394
	625	350	137,5	544
	775	500	137,5	694
21	325	150	87,5	244
	475	300	87,5	394
	625	450	87,5	544
	775	600	87,5	694