



LEVO

*COMMITTED TO
TIMELESS ELEGANCE*

Maximum performance in a small package

LEVOs modest space requirement, a mere 88 mm from wall to front edge, makes installation easy even in small bathrooms or kitchens, with no loss of comfort or living area.

Enhances heating convenience

Behind the smooth surface of LEVO, with the sensual aura it radiates is perfection of form housing cutting-edge technology: this is the guarantee for rapid heat-up times and dynamic heat distribution!

Your favourite colour – now a reality not a dream

Another of LEVOs advantage is the extraordinarily wide range of RAL and sanitary ware colours available to choose from, in some cases even including metallic-look and structural colours. The elegant towel rail is the ideal textiles hanger.

ELEGANT PLANE VERTICAL RADIATOR

heatingthroughinnovation.


Facts:

- elegant look
- compact dimension - shallow depth
- high thermal performance
- wide range of colours
- rounded side panels



LEVO
 TECHNICAL
 INFORMATION
 AND PRICES

type	↔	X	Y	Z
11	380	100	140	244
	530	200	165	394
	680	350	165	544
	830	500	165	694
21	405	150	128	244
	555	300	128	394
	705	450	128	544
	855	600	128	694

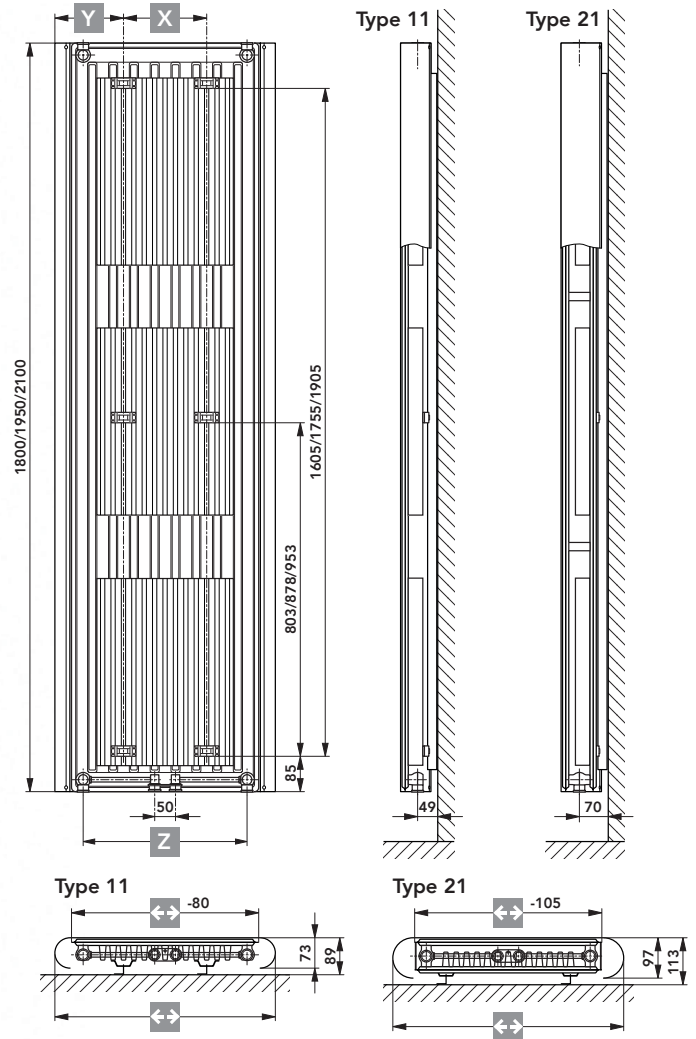

TECHNICAL INFORMATION AND PRICES

type	structural height [mm]	effective length [mm]	structural length [mm]	75/65/20°C [Watt]	radiator exponent n	water content/m [l]	weight/m [kg]	item number	price EUR
11	1800	380	300	653	1,2810	3,50	21,00	F2V1118003010000	490,-
		530	450	976	1,2761	5,25	30,37	F2V1118004510000	580,-
		680	600	1298	1,2711	7,00	39,73	F2V1118006010000	670,-
	1950	380	300	720	1,2418	3,80	23,20	F2V1119503010000	510,-
		530	450	1056	1,2811	5,47	33,88	F2V1119504510000	600,-
		680	600	1393	1,3205	7,13	44,57	F2V1119506010000	690,-
		830	750	1729	1,3598	8,80	55,25	F2V1119507510000	780,-
	2100	680	600	1429	1,2575	8,12	47,75	F2V1121006010000	710,-
830		750	1749	1,2685	10,15	59,20	F2V1121007510000	800,-	
21	1800	405	300	886	1,3192	6,44	30,08	F2V2118003010000	620,-
		555	450	1329	1,3192	9,66	45,12	F2V2118004510000	720,-
		705	600	1772	1,3192	12,88	60,16	F2V2118006010000	850,-
	1950	405	300	936	1,3231	7,24	32,80	F2V2119503010000	640,-
		555	450	1405	1,3231	10,86	49,20	F2V2119504510000	740,-
		705	600	1873	1,3231	14,48	65,60	F2V2119506010000	870,-
		855	750	2341	1,3231	18,10	82,00	F2V2119507510000	970,-
	2100	705	600	1957	1,3327	15,28	70,24	F2V2121006010000	900,-
		855	750	2446	1,3327	19,10	87,80	F2V2121007510000	990,-