





FULDA		Heat output ⁽¹⁾ in Watts					Radiator exponent n	E-heat element Output ⁽²⁾ Watt		Weight kg	Water content l
Nominal height (Overall height) [mm]	Overall length [mm]	75/65/20 °C	70/55/20 °C	70/55/24 °C	55/45/20 °C	55/45/24 °C		Colour paint	chrome-plated / gold plated		
		800 (758)	500	405	343	307	240	205	1,024	300	-
600	474		401	359	281	240	1,024	300	300	8,2	3,7
750	574		486	435	340	291	1,024	300	300	9,7	4,5
900	671		568	508	398	340	1,024	300	300	11,2	5,3
1200 (1220)	500	620	509	446	333	276	1,219	300	300	11,1	5,2
	600	724	594	520	389	323	1,219	600	300	12,7	6,0
	750	877	719	630	471	391	1,219	600	300	15,0	7,1
1800 (1766)	500	870	712	623	463	384	1,235	600	300	15,9	7,4
	600	1021	835	731	543	450	1,235	600	600	18,2	8,5
	750	1241	1015	888	660	547	1,235	900	600	21,7	10,1
	900	1456	1191	1042	775	642	1,235	900	900	25,2	11,7

⁽¹⁾ Tested in accordance with ÖNORM EN 442 ⁽²⁾ at 60° C

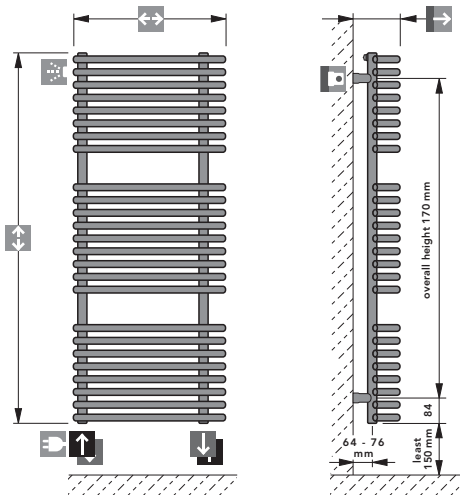

Overall depth (incl. wall clearance)
 for an overall length of 500 146 - 158 mm
 for an overall length of 600 155 - 167 mm
 for an overall length of 750 171 - 183 mm
 for an overall length of 900 180 - 192 mm

Boss spacing
 for an overall length of 500 400 mm
 for an overall length of 600 495 mm
 for an overall length of 750 645 mm
 for an overall length of 900 795 mm

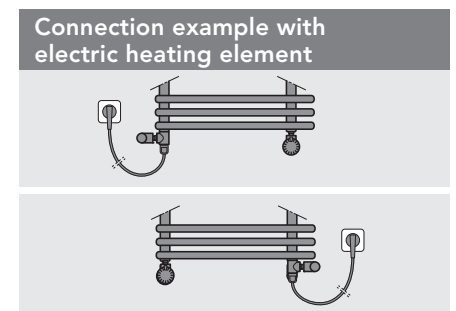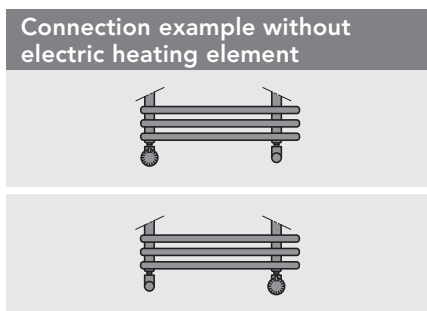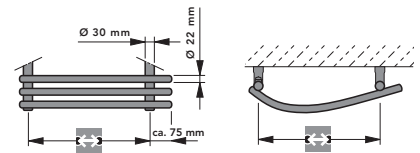


Connections
 2 x G 1/2 Internal thread and
 1 x G 1/4 Internal thread (for vent plug)
Connection modes
 see diagram

Test overpressure
 13 bar

Maximum positive operating pressure
 10 bar max.

Maximum operating temperature
 110 °C

A special adapter (chrome-plated) should be used for the electric heating insert with the FULDA Design radiator!




Accessory: PTC electric heating element
 All FULDA design radiators fitted with an electric heating element can also be used when the regular heating system is switched off. It is essential to take into account the power ratings assigned to the electric heating elements.

- Standard basic configuration**
- A pivotable vent plug, G 1/4, nickel-plated brass, self-sealing
 - Wall fastening set matching the radiator colour
 - Fitting aid
 - Instruction sheet

206 FULDA Design radiator - electric only operation


Technical data

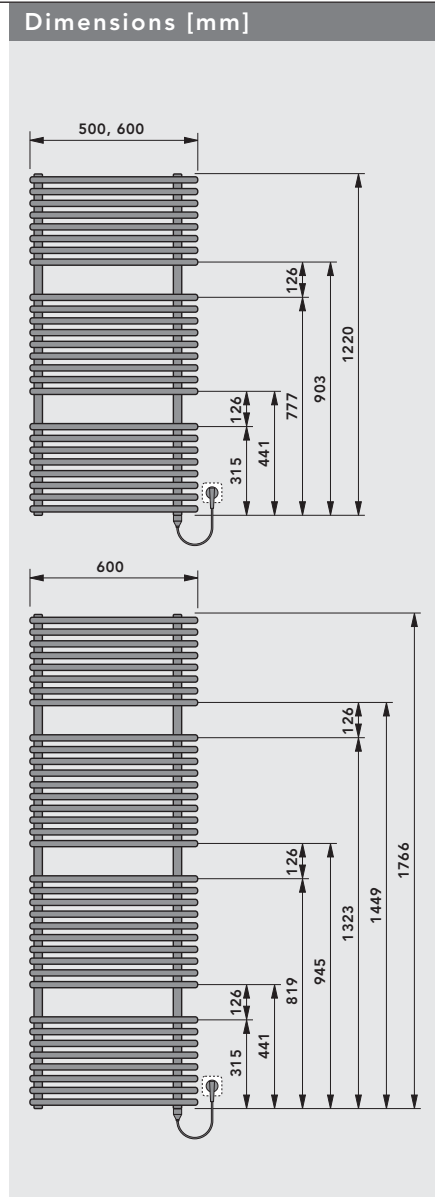

FULDA electric only operation

Nominal height (Overall height) [mm]	Overall length [mm]	Nominal power ⁽²⁾ Watts	Nominal power ⁽²⁾ Watts (chrome-plated / gold plated)	Nominal voltage [V]	Protection mode	Weight kg
1200 (1196)	500	400	300	AC 230	IP 24	16,3
	600	600	400	AC 230	IP 24	18,6
1800 (1766)	600	900	600	AC 230	IP 24	26,6

⁽²⁾ at 60° C

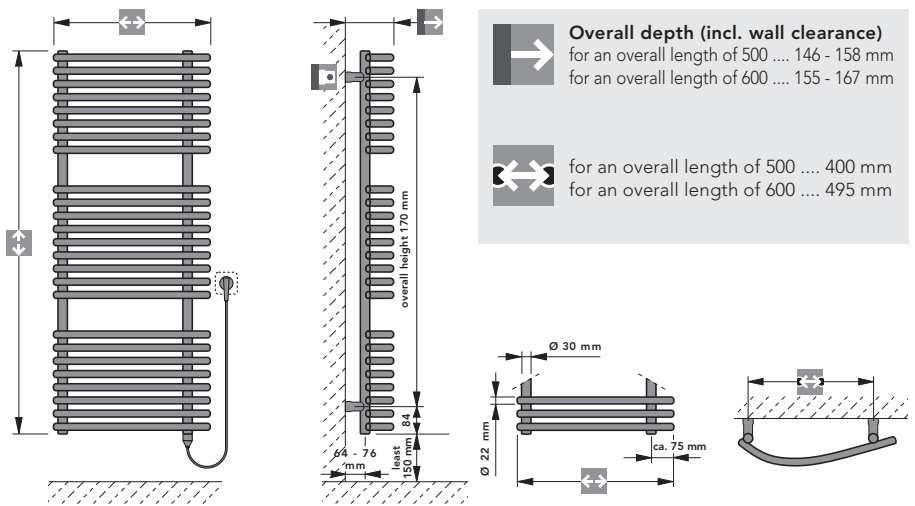

Description:

With their built-in electric heating, the electric radiators of the FULDA-E family are elegant Design and bathroom radiators.

Self-regulation effect – the temperature-dependent PTC heating element automatically controls the temperature of the heat-transfer liquid by modifying its electrical resistance.

Standard basic configuration:

- A wall mounting set matching the radiator colour
- Fitting aid
- Instruction sheet

