
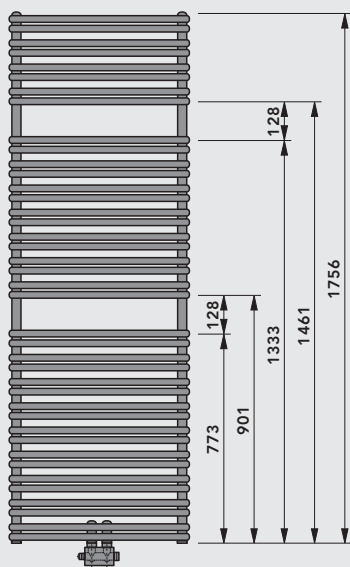
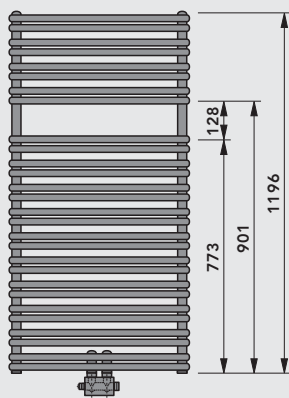


Vertical dimensions [mm]




Technical data, product family


Nominal height (overall height)	Diagram scale M 1:50				Overall length [mm]	Heat output ⁽¹⁾ in Watts 75/65/20 °C	Radiator exponent n	E-heating element power ⁽²⁾ [Watts]
	498	596	742	887				
800 (796)					498	440	1,169	300
					596	528	1,167	300
					742	659	1,165	300
					887	790	1,162	600
1200 (1196)					498	649	1,211	300
					596	778	1,191	600
					742	972	1,162	600
					887	1165	1,133	600
1800 (1756)					498	920	1,221	600
					596	1103	1,197	600
					742	1378	1,161	900
					887	1651	1,124	900

⁽¹⁾ Tested in accordance with ÖNORM EN 442

Connection example without electric heating element

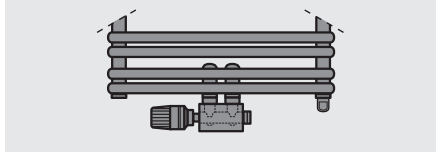

Connection example with electric heating element

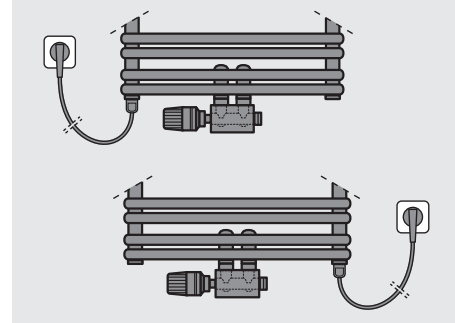

Connections

2 x external thread G 3/4 (for valve connection set), 2 x internal thread G 1/2, and 1 x internal thread G 1/4 (for vent plug)
Connection modes see diagram



Test overpressure

13 bar



Maximum positive operating pressure

10 bar



Maximum operating temperature

110 °C

Accessory: PTC electric heating element

CAVALLY-VM radiators fitted with an electric heating element can also be used at times when the regular heating system is switched off.



It is **absolutely necessary** to take account of the power-ratings assigned to the electric heating elements.

Basic standard accessories (included):

- a pivotable vent plug, G 1/4, and two dummy plugs, G 1/2, nickel-plated brass, self-sealing, factory-sealed
- a valve connection set with angled two-pipe design
- covering rosette in matching radiator colour
- wall fastening set matching the radiator colour
- fitting aid
- instruction sheet

RAL 9016 Traffic White	Various RAL and metallic colours	Sanitary ware colours
Item no.	Item no.	Item no.
DGRAB0805A	DGRAF0805A	DGRAS0805A
DGRAB0806A	DGRAF0806A	DGRAS0806A
DGRAB0807A	DGRAF0807A	DGRAS0807A
DGRAB0809A	DGRAF0809A	DGRAS0809A
DGRAB1205A	DGRAF1205A	DGRAS1205A
DGRAB1206A	DGRAF1206A	DGRAS1206A
DGRAB1207A	DGRAF1207A	DGRAS1207A
DGRAB1209A	DGRAF1209A	DGRAS1209A
DGRAB1805A	DGRAF1805A	DGRAS1805A
DGRAB1806A	DGRAF1806A	DGRAS1806A
DGRAB1807A	DGRAF1807A	DGRAS1807A
DGRAB1809A	DGRAF1809A	DGRAS1809A

⁽²⁾ At 60 °C

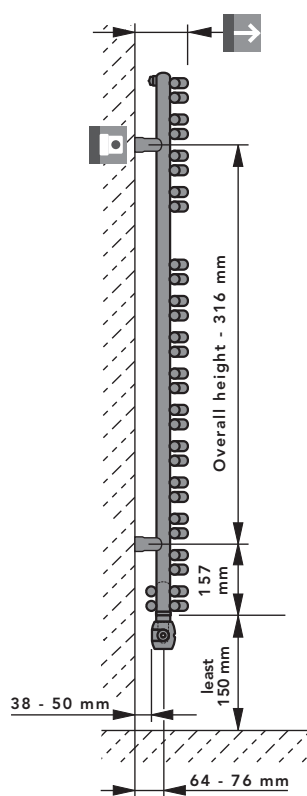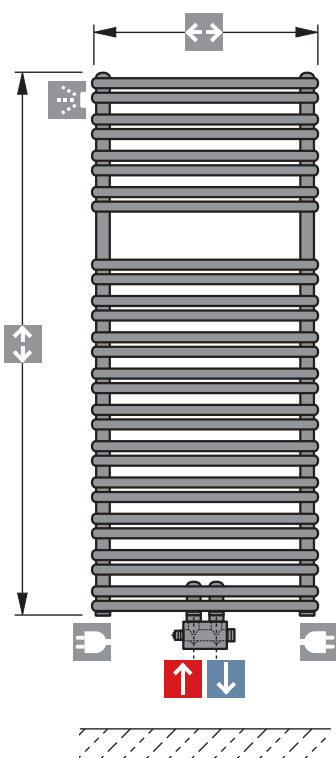

➔	Overall depth (incl. wall clearance)	
	for an overall length of 498 ...	119-131 mm
	for an overall length of 596 ...	128-140 mm
	for an overall length of 742 ...	146-158 mm
	for an overall length of 887 ...	164-176 mm
↔	for an overall length of 498 ...	451 mm
	for an overall length of 596 ...	548 mm
	for an overall length of 742 ...	691 mm
	for an overall length of 887 ...	835 mm

